

DSP6064

Wall Mount Speaker



Description

The DSP6064 is a wall-mounted speaker equipped with a built-in 70V/100V transformer. This high-voltage, low-current transmission mode enables long-distance distribution and the parallel connection of multiple speakers. Featuring a metal grille and an ABS enclosure in black and white, this speaker ensures long-lasting durability without deformation or fading. Its high sensitivity delivers clear and resonant sound quality. The speaker offers a simple and secure wall installation with hanging holes, making it an ideal option for industrial and commercial settings such as hotels, schools, offices, and factories where background music and public address systems are required.

Features


- Voltage: 70V/100V; rated power: 50W ; MAX. SPL.: 108±2dB; effective frequency range: 55Hz-20kHz.
- Weight: 7.2kg, equipped with hanging holes for mounting.
- Made of high-quality engineering plastic, for long-term durability without deformation or fading.
- High sensitivity: 91±2dB, delivering clear and bright sound.

Specifications

| Model | | DSP6064 |
|----------------------|------|---------------|
| Speaker Unit | | 8"×1, 1"×1 |
| Rated Power | | 50W |
| Rated Voltage | 70V | 25W |
| | 100V | 50W |
| Sensitivity (1m, 1W) | | 91±2dB |
| MAX. SPL. (1m) | | 108±2dB |
| Frequency Response | | 55Hz-20kHz |
| Weight | | 7.2kg |
| Dimensions (HWD) | | 436×290×285mm |


Frequency Response

(dB SPL, 1W, 1m)

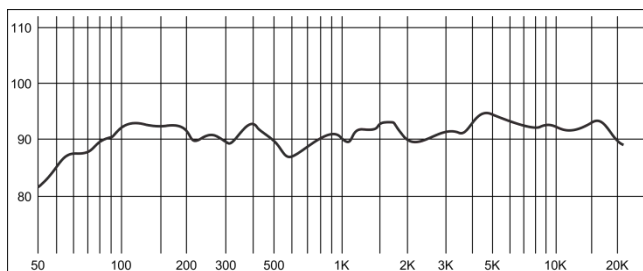

Distortion

(THD < 1.5% 1W, 1m, 200Hz-12kHz)

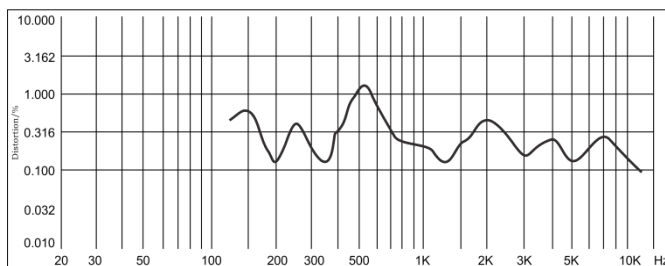

Product Size

