

CM10 Paging Microphone



Description

This product is a paging microphone used in public address system. With a built-in chime, it is easy to operate and suitable for different occasions.


Features

- Easy to operate, suitable for different occasions.
- Support terminal plug-and-play.
- With selectable output voltage.
- With delayed automatic shutdown function.
- With a flexible microphone.

Specifications


Model	CM10
Microphone Output Voltage	600mV±10mV or 20mV±10% (Unbalanced)
Rated Chime Output Voltage	600mV±10mV or 20mV±10%
Output Chime Type	CHIME UP: 1-3-5-i-
S/N Ratio	CHIME DOWN: i-5-3-1-
Frequency Range	100Hz-15kHz
Distortion	MIC: ≤1%
Dimensions (L×W×H)	190×136×44mm
Net Weight	1.2kg

Front Panel

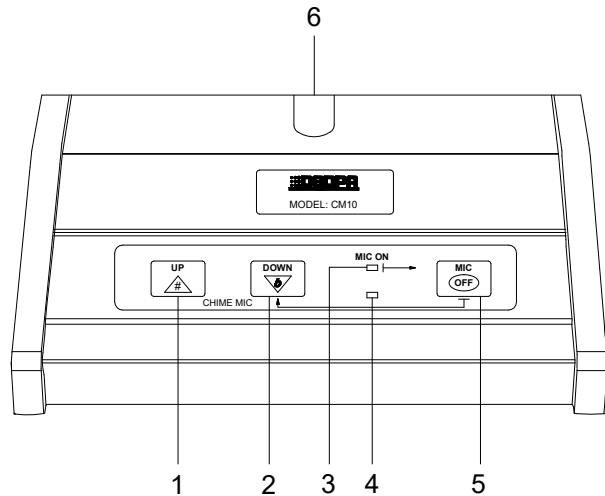

- 1. Chime Up Button
- 2. Chime Down Button
- 3. Microphone Indicator
- 4. Power Indicator
- 5. Microphone Off Button
- 6. Microphone

Rear Panel

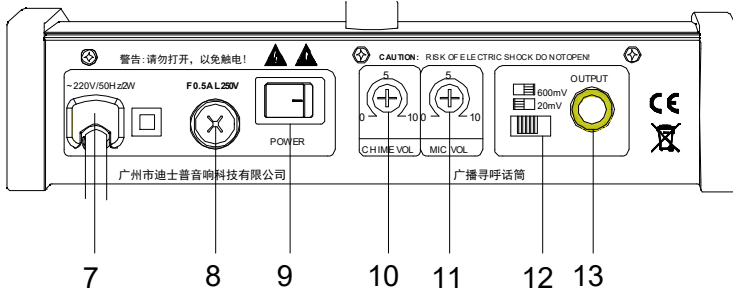

- 7. AC220V Power Cord
- 8. AC220V Fuse
- 9. Power Switch
- 10. Chime Volume Control
- 11. Microphone Volume Control
- 12. Output Voltage Selection Switch
- 13. Output Port