

DSP6064

Wall Mounted Speaker with Power Tap



Description

The DSP6064 is a wall-mounted speaker equipped with a built-in 70V/100V transformer. This high-voltage, low-current transmission mode enables long-distance distribution and the parallel connection of multiple speakers. Featuring a metal grille and an ABS enclosure in black and white, this speaker ensures long-lasting durability without deformation or fading. Its high sensitivity delivers clear and resonant sound quality. The speaker offers a simple and secure wall installation with hanging holes, making it an ideal option for industrial and commercial settings such as hotels, schools, offices, and factories where background music and public address systems are required.

Features


- Voltage: 70V/100V; rated power: 50W; MAX. SPL.: 108±2dB; effective frequency range: 55Hz-20kHz.
- Weight: 7.2kg, equipped with hanging holes for mounting.
- Made of high-quality engineering plastic, for long-term durability without deformation or fading.
- High sensitivity: 91±2dB, delivering clear and bright sound.

Specifications

Model		DSP6064
Speaker Unit		8"×1, 1"×1
Rated Power		50W
Input	Constant Voltage	70V
		100V
Sensitivity (1m, 1W)		91±2dB
MAX. SPL. (1m)		108±2dB
Frequency Response		55Hz-20kHz
Weight		7.2kg
Dimensions (HWD)		442×255×176mm


Frequency Response

(dB SPL, 1W, 1m)

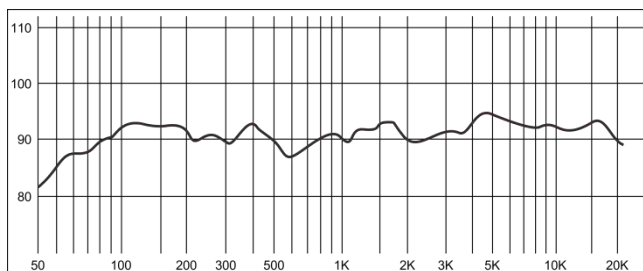

Distortion

(THD < 1.5% 1W, 1m, 200Hz-12kHz)

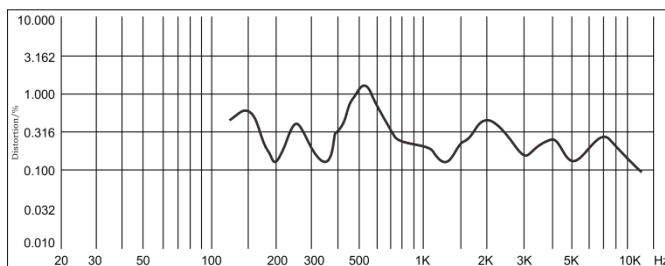

Product Size

