

## DSP9122 / DSP9124

### 2-Channel / 4-Channel Network Audio Collector



### Description

Network audio collector is the local independent audio source for digital acquisition and real-time transmission to the network, so that the network can play the equipment used. It is a non-networked audio source transformed into a network source device. The series of equipment with modular design, are equipped with 2-channel and 4-channel audio capture module to meet different needs.

### Features

- Built-in independent control module, sound source real-time acquisition
- Each module can run simultaneously without interfering with each other
- 2-channel or 4-channel audio acquisition model are available
- The name of each audio source input can be customized by management software.
- 10 / 100M adaptive, support DHCP / IP settings
- 1U chassis, small-sized and lighter; anodized aluminum alloy panel, beautiful and durable.


### Specifications

Model	DSP9122	DSP9124
Frequency Response	20Hz-20kHz	
Protocols	TCP/IP, UDP, ICMP, IGMP(Group Broadcast)	
Audio Mode	16 CD Sound Quality	
SNR	> 85dB	
Input Sensitivity	1.0V	

Power Input	~100-240V/50-60Hz
Network	RJ45 (10/100M)
Package Size	105 × 280 × 540mm
Product Size	44 × 430 × 213mm
Gross Weight	2.9kg
Net Weight	1.8kg

## Front / Rear Panel

### Front panel

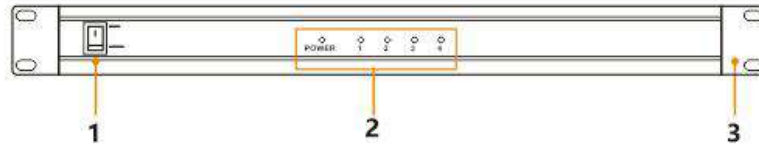


1. Power Switch
3. Mounting Bracket


2. Status Indicator

### Rear panel

#### DSP9122




#### DSP9124

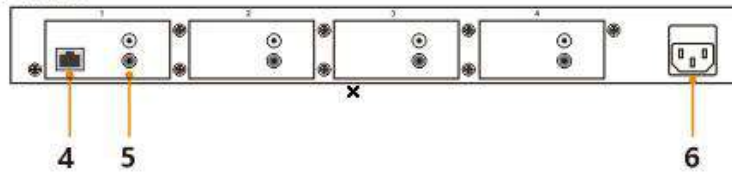

- 4 Network Port(RJ45)
6. Power Interface

5. Audio Signal Input (RCA)

## Product Information

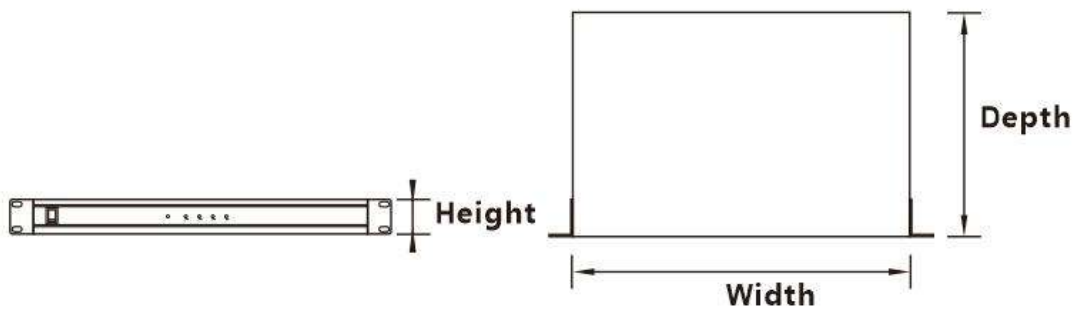

Model	H	W	D
DSP9122	44	430	213
DSP9124			

(Unit: mm)