

MP9808R PA System Digital AM/FM Tuner




Features

- Digital tuner with MPU control.VFD display;
- Touch key and VFD display;
- 40 memories for each AM & FM;;
- Auto save with auto station search;
- Level meter for audio output;
- Memory function after power off;
- Tuner in module design, which can be separated from the main unit to place at a position for better reception of the signal.

Specification


Band	FM	87.0MHz-108.0MHz
	AM	522kHz-1620kHz
Sensitivity	FM	26dB μ
	AM	52dB μ
S/N	FM	Mono 76dB, Stereo 70dB
	AM	40dB
Freq. Step	FM	50kHz
	AM	9kHz
MF	FM	10.7MHz
	AM	450kHz
Output level	0dBV	
Protection	AC fuse	
Power Requirement	AC220V/50Hz	
Outer Dimensions (mm)	(L×W×H) 555×455×185	
Machine Dimension (mm)	(L×W×H) 483×378×88	
Gross weight	8.2kg	
Net weight	6.5kg	

FRONT PANEL

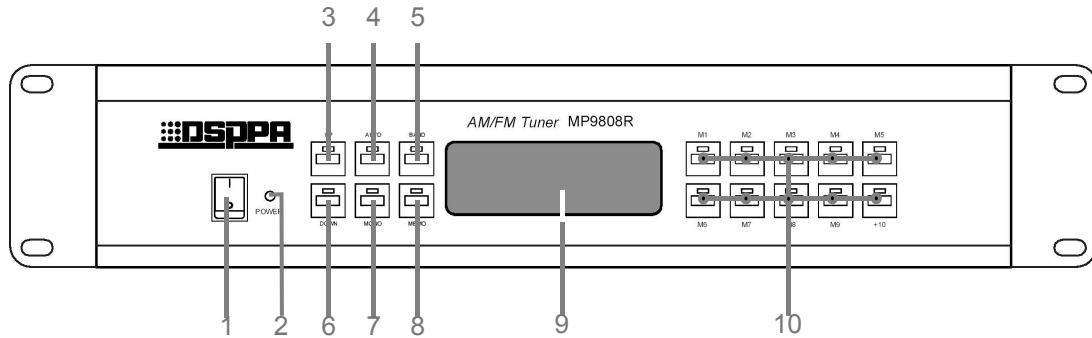

- | | |
|--|-------------------------|
| 1 Power switch (is power on and the “power indicator” is on) | 6 Down search key |
| 2 Power indicator | 7 Mono/Stereo shift key |
| 3 Up search key | 8 Memory key |
| 4 Auto search key | 9 Display screen |
| 5 Band shift key | 10 Digital keys |

REAR PANEL

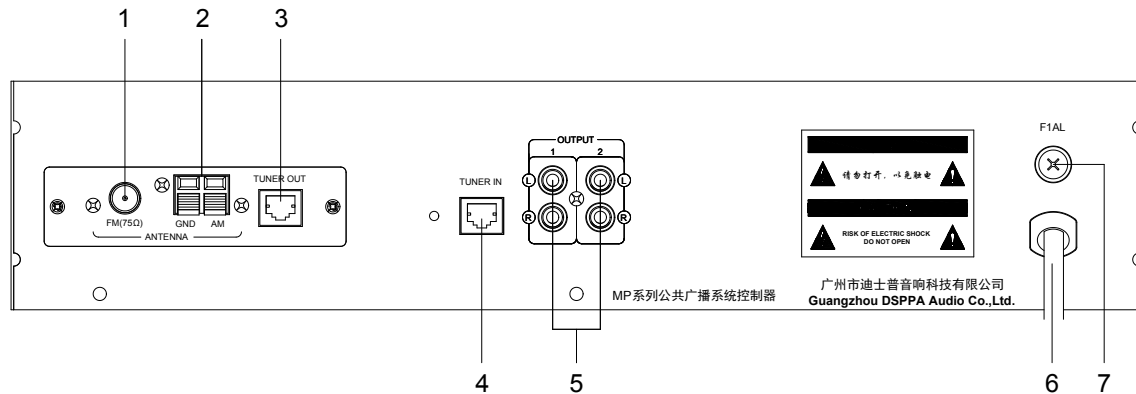

- | | |
|------------------------------|-----------------|
| 1 FM antenna jack | 5 Output jack |
| 2 AM antenna jack | 6 AC power cord |
| 3 Tuner module signal output | 7 AC Power fuse |
| 4 Tuner signal input | |